

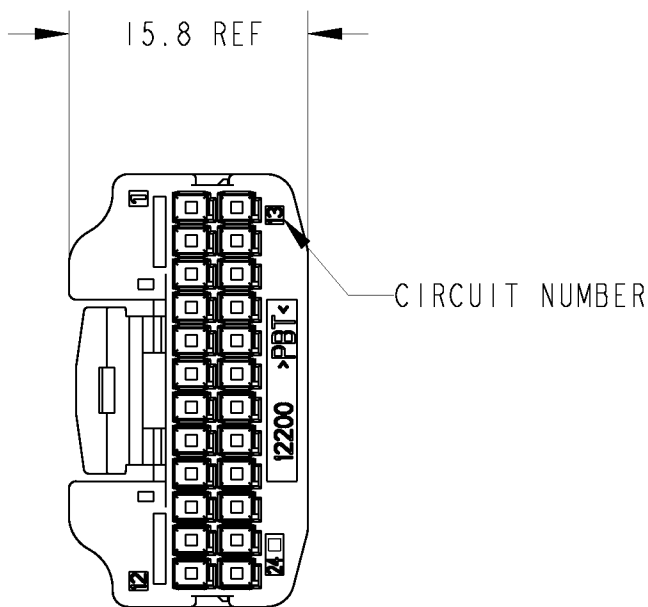
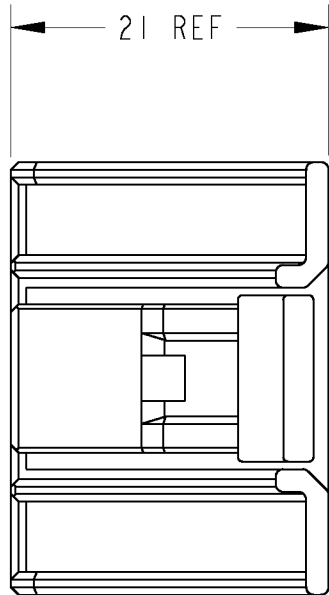


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J			CI	REVISED PER ECO-11-005140	05APR2011	RK

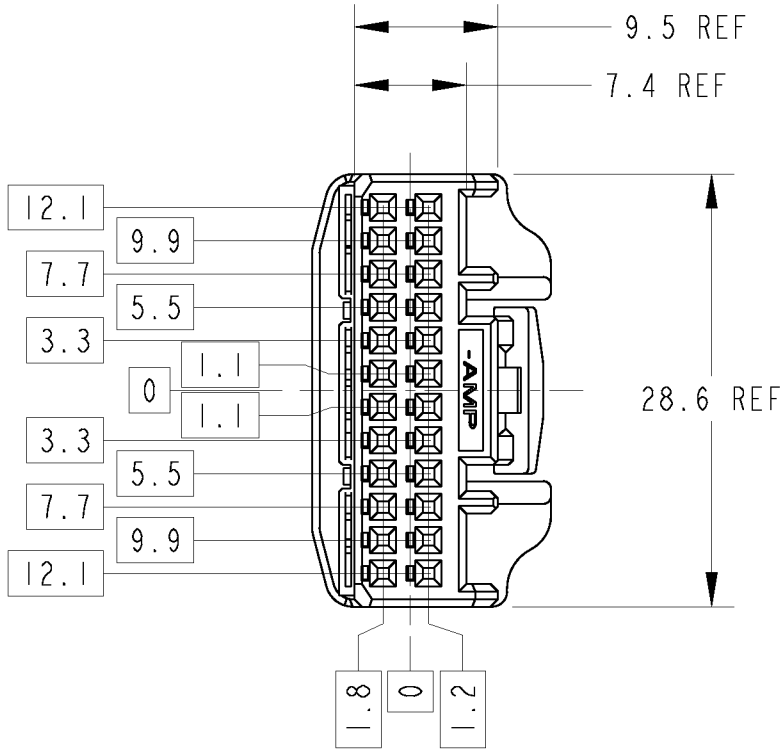

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
24	1318853-1


		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/CAVUS 0.3~0.5mm ² AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

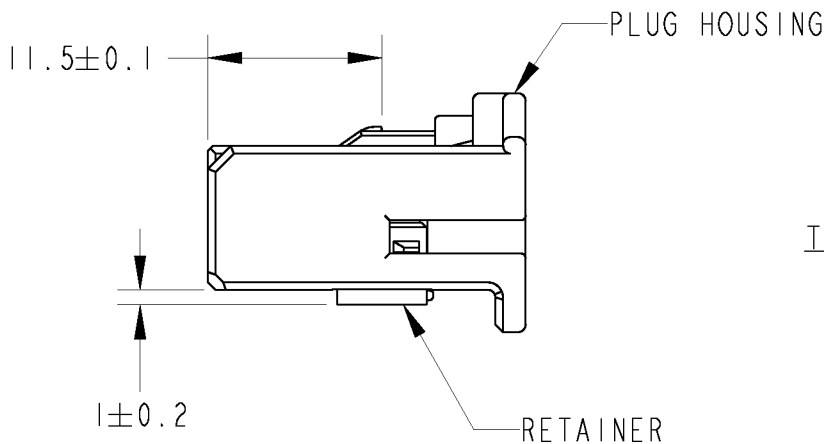

PAPER BOX ダンボール	PLASTIC BAG ビニール袋	BLACK 7	1318917-2
PAPER BOX ダンボール	PLASTIC BAG ビニール袋	NATURAL 7	1318917-1
OUTER 外装	INNER 内装	COLOR	PART NUMBER
PACKING STYLE 梱包形態			

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
4. INSTRUCTION SHEET NO : 411-5928
5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
6. APPLIED TERMINAL : SEE TABLE -2
7. RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナーを仮止して出荷する
2. 仮係止時リテーナー突起がハウジングの外側に出ていること
3. リテーナーの仮係止保持力は 20N 以上
4. 取扱説明書 NO : 411-5928
5. 嵌合相手型番は TABLE -1参照
6. 適用端子は TABLE -2参照
7. リテーナーはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN N. YASUDA	08MAR00	 TE Connectivity			
		CHK N. SAI	10MAR00				
		APVD N. SAI	10MAR00				
DIMENSIONS: 単位: 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3		NAME 名称 025 SERIES 24POSITION PLUG HOUSING ASSEMBLY -			
		0-PLC ±					
		1-PLC ±0.1					
		2-PLC ±0.01					
		3-PLC ±0.001					
		4-PLC ±0.0001					
		ANGLES ±3'00"					
MATERIAL 材料 PBT		FINISH 仕上 SEE TABLE-3		RESTRICTED TO			
		WEIGHT 3.68 g					
CUSTOMER DRAWING				SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-1318917	
				SCALE 尺度 2:1	SHEET 1	OF 1	REV CI