




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-13-019095	05DEC2013	DR	RB

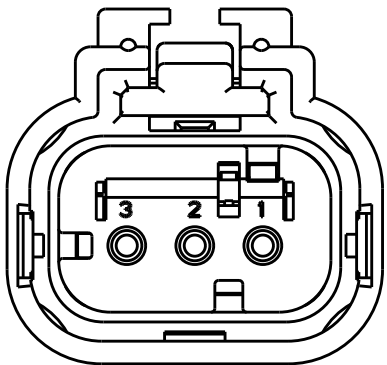

776429-2
SCALE 2:1
KEY B

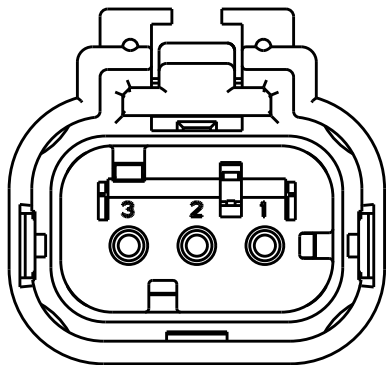


776429-3
SCALE 2:1
KEY C

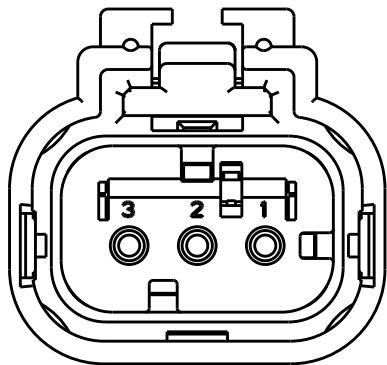


776429-4
SCALE 2:1
KEY D


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: GREEN
- 4 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
5. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.
- 6 MATERIAL: SILICONE
COLOR: TAN

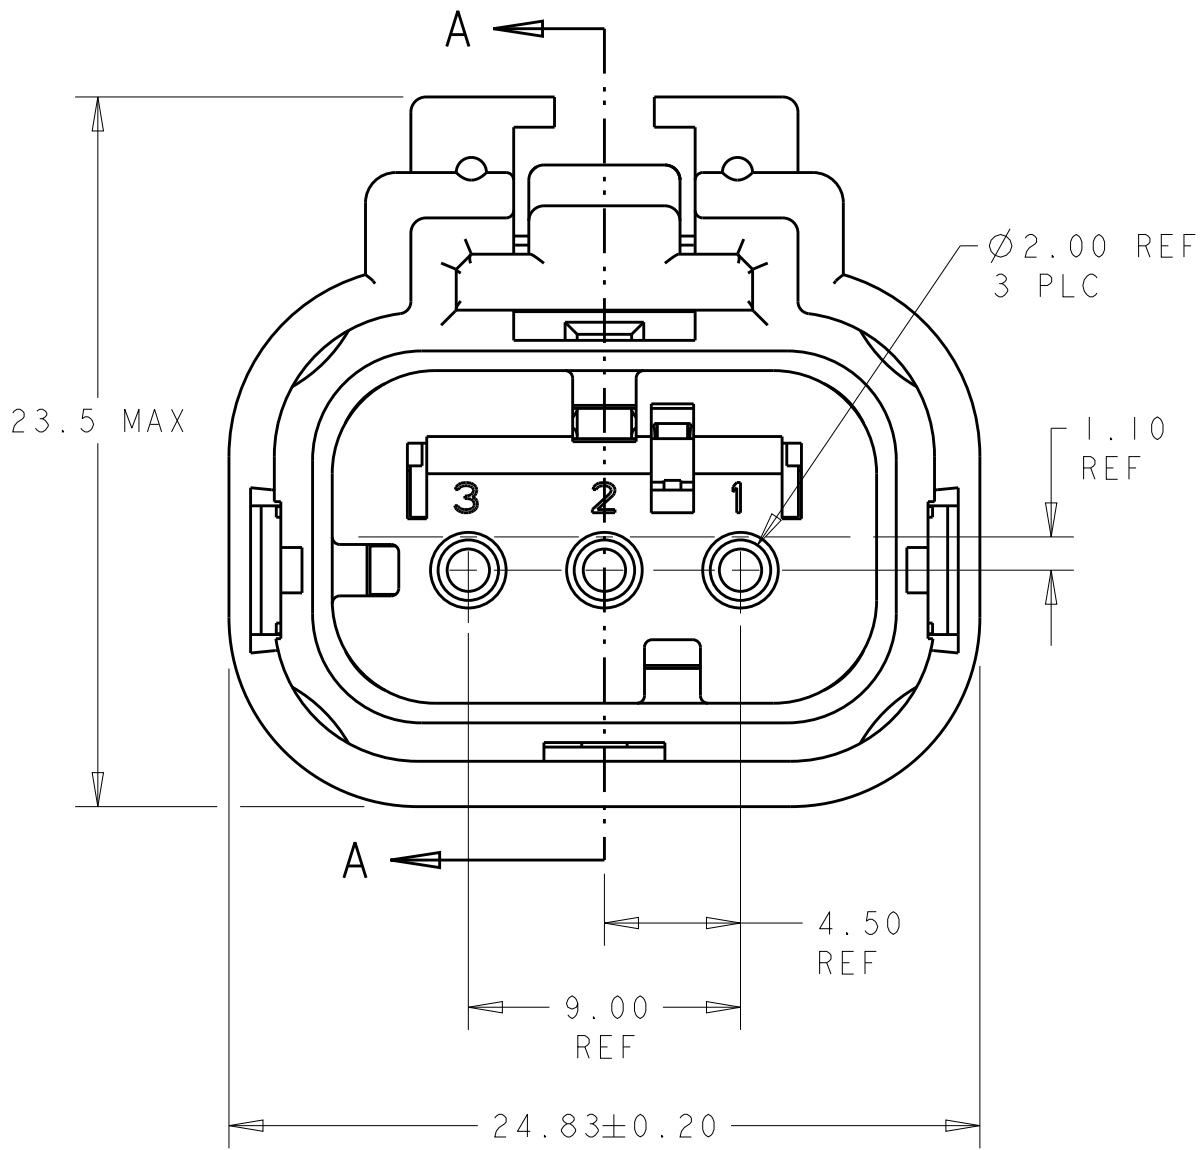


776429-1 SHOWN
KEY A

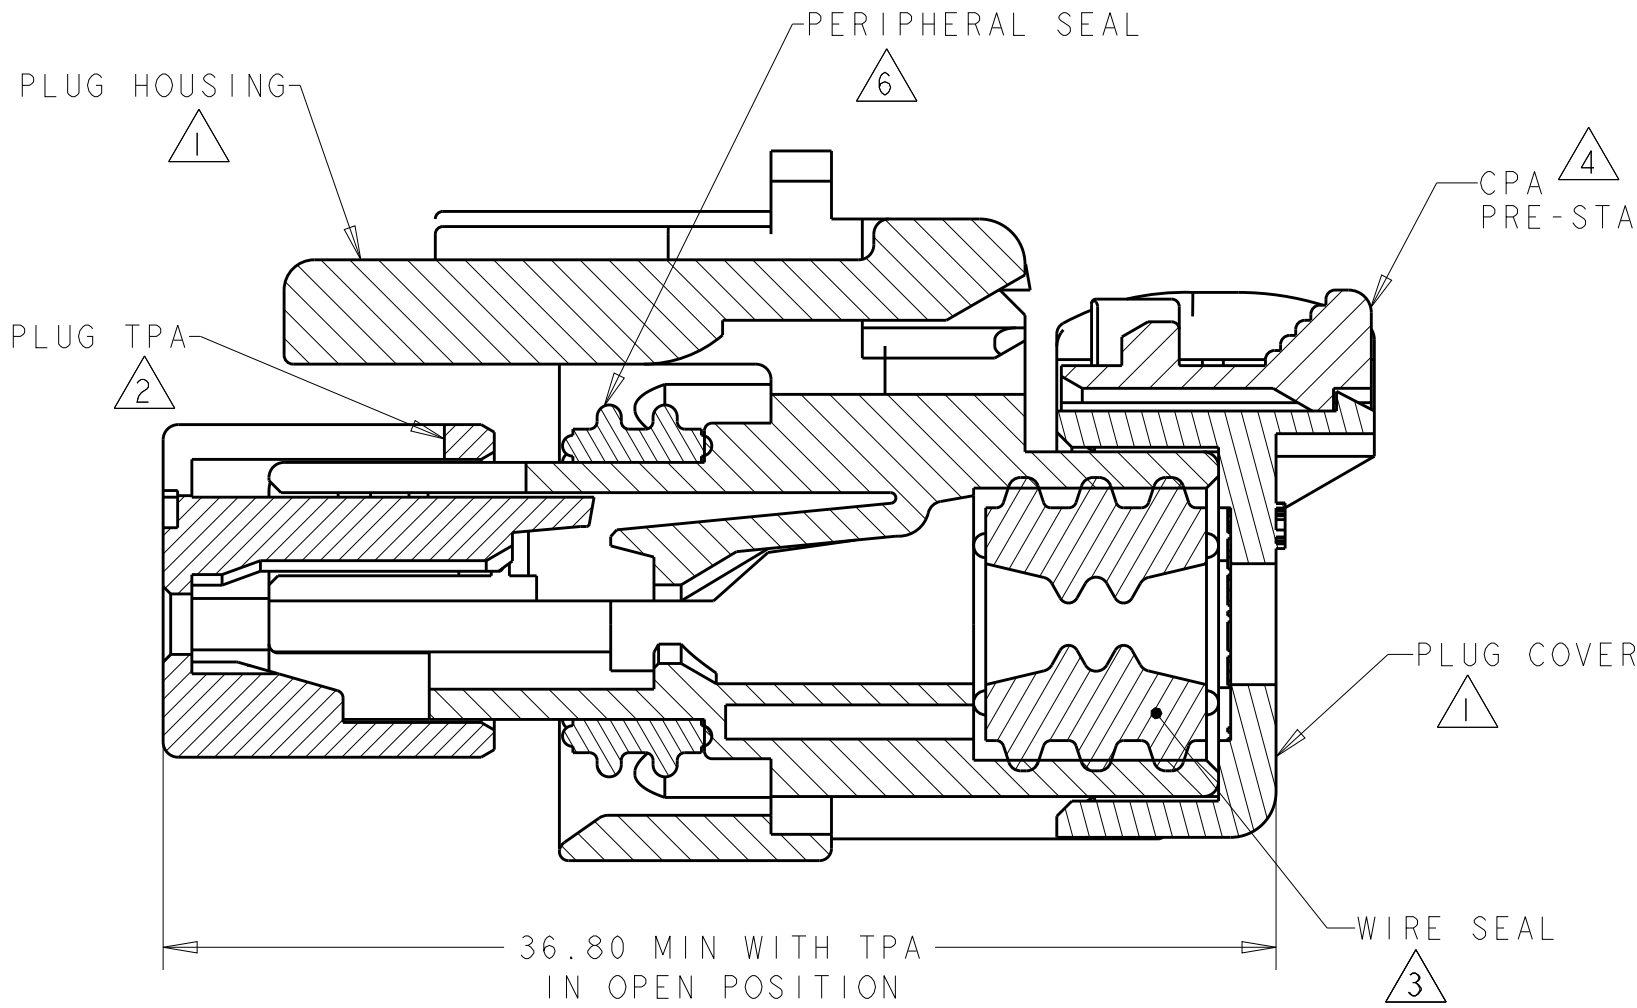


SECTION A-A

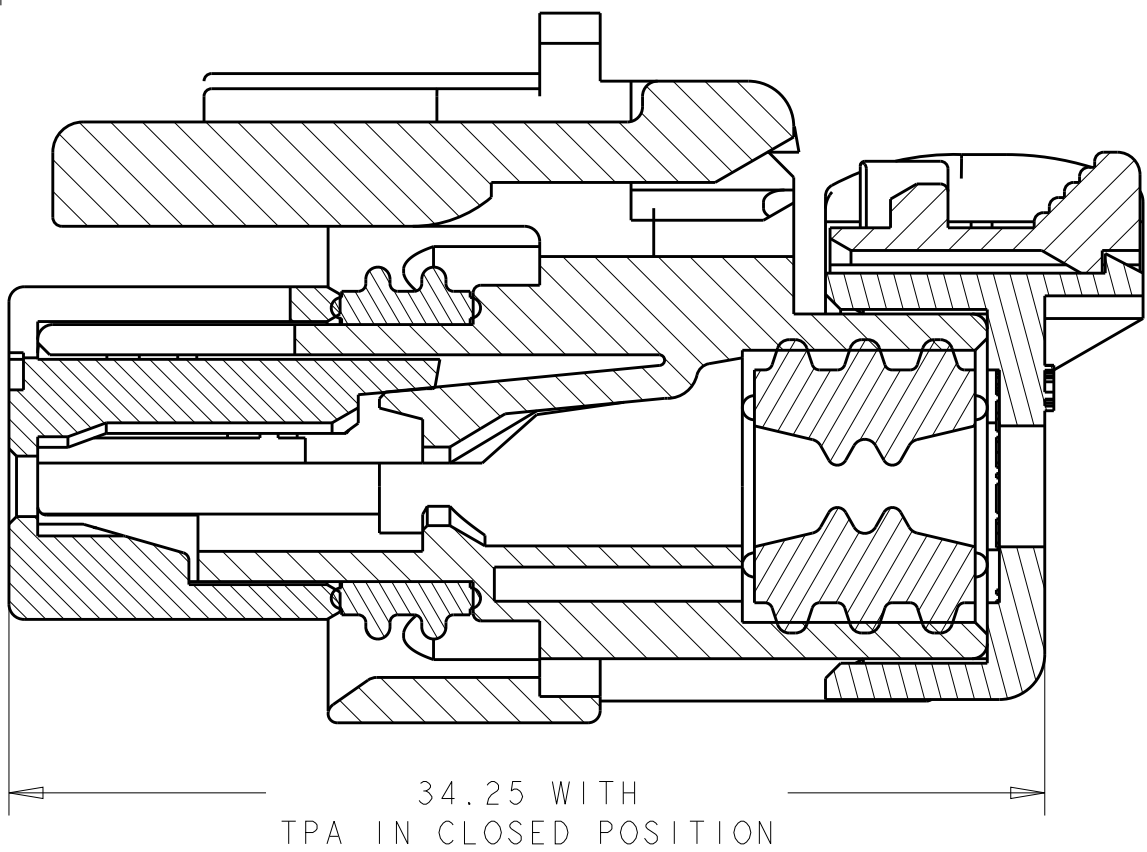

SECTION A-A

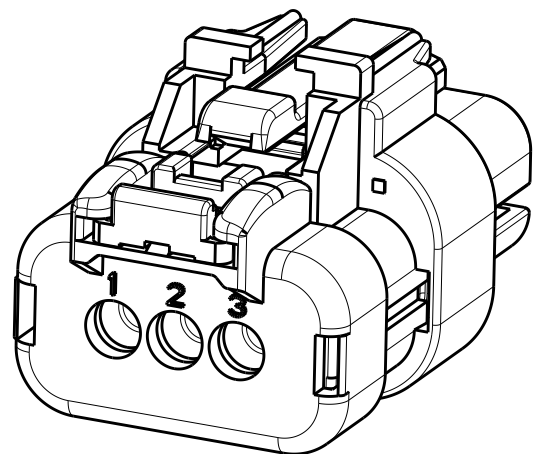

SCALE 2:1

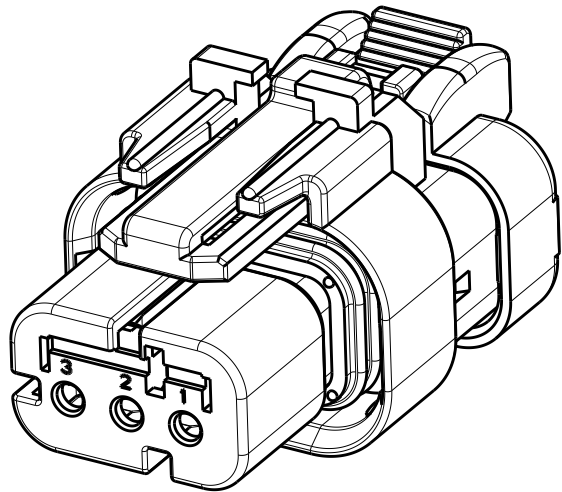

SCALE 2:1

D	GREEN	776429-4
C	YELLOW	776429-3
B	GRAY	776429-2
A	RED	776429-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJ GRAFF	22FEB00	TE Connectivity		
DIMENSIONS:		CHK R GREINER	11DEC01			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M TRULL	11DEC01	NAME		
mm		PRODUCT SPEC		PLUG ASSEMBLY, 3 POSITION, SINGLE ROW AMPSEAL 16		
0 PLC ±		108-2184		SIZE		
1 PLC ±		APPLICATION SPEC		CAGE CODE		
2 PLC ±		114-13065		DRAWING NO		
3 PLC ±		WEIGHT		RESTRICTED TO		
4 PLC ±		10		A260779		
ANGLES ±		Customer Drawing		SCALE 4:1		
FINISH				SHEET OF		
-				REV F		
-						