
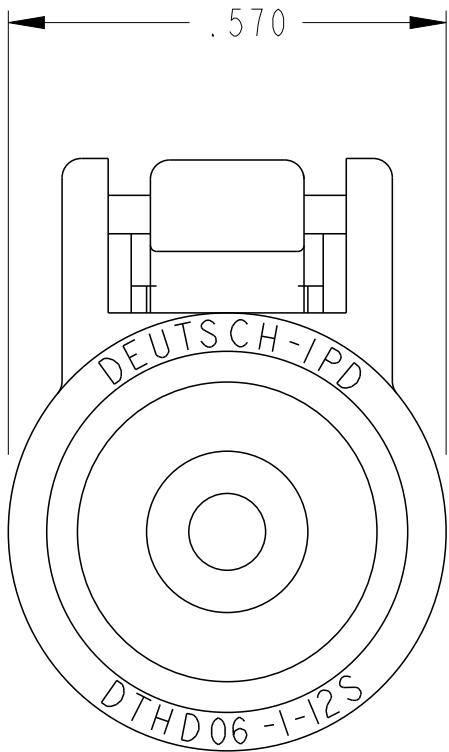
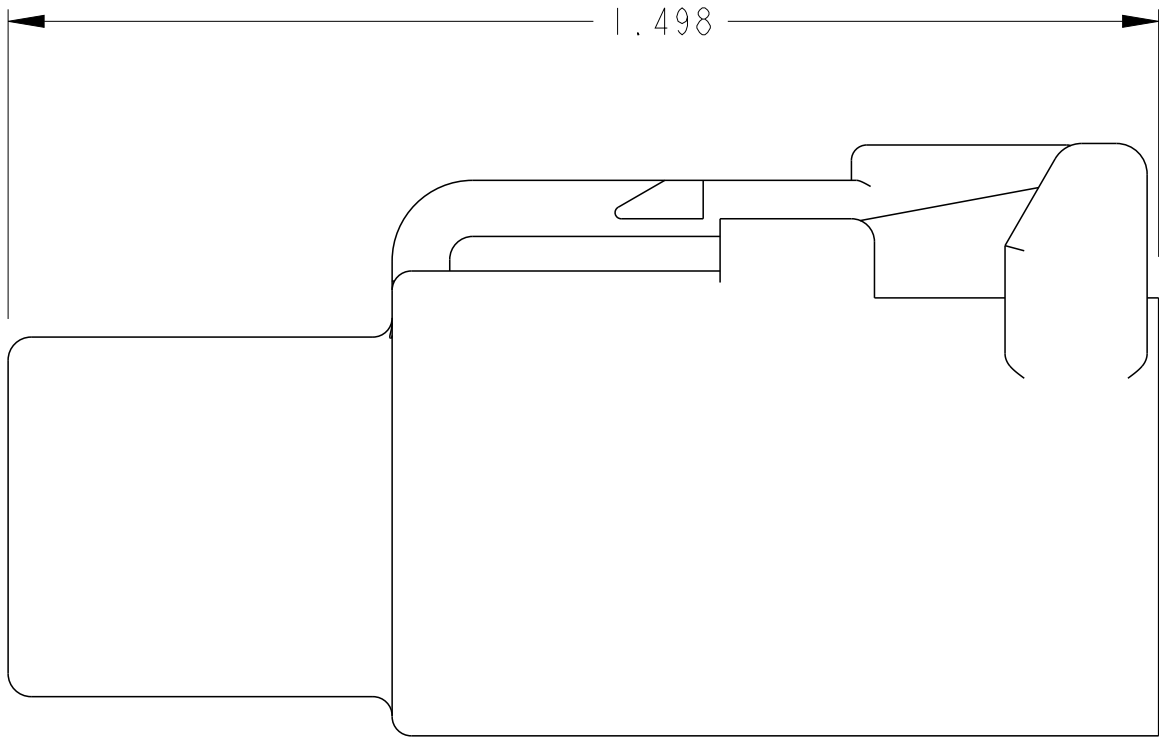
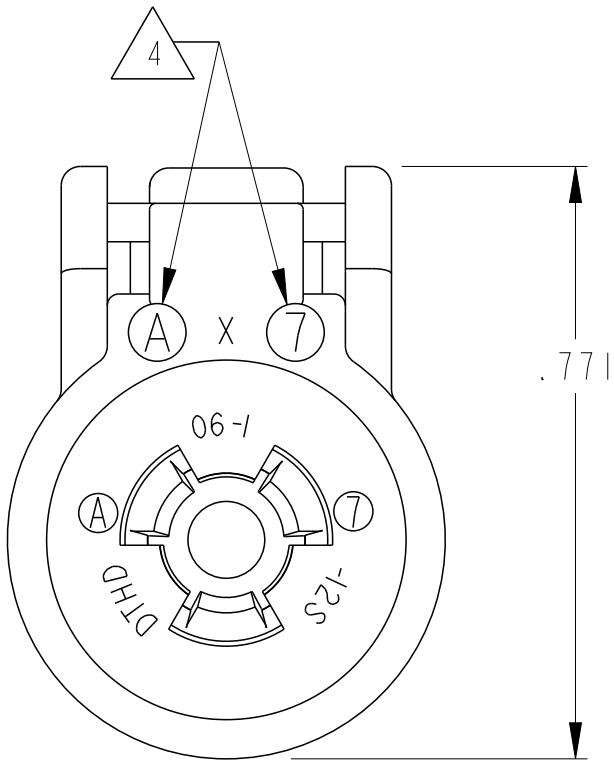


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER E.O. P18604	06/21/04	-	DM
	AI	DRAWING UPDATED	12MAR2024	RK	CB

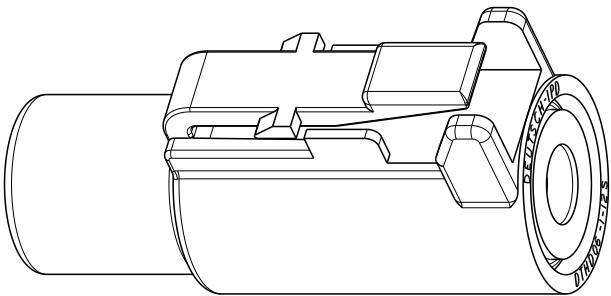

4 DATE CODE: MONTH IS REPRESENTED BY SEQUENTIAL ALPHA CHARACTERS. EX: A = JANUARY.
YEAR IS REPRESENTED BY LAST NUMERIC DIGIT. EX: 2 = 2002.


3 MATERIAL: HOUSING: PLASTIC, GROMMET: RUBBER.

2 THIS PLUG MATES WITH DTHD04-1-12P-XXXX RECEPTACLE.
(**** = ALL MODIFICATIONS)

1 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTIC
SEE ENVELOPE DRAWING 0425-015-0000.

NOTES: UNLESS OTHERWISE SPECIFIED.

WIRE INSULATION DIA		
CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.
12	.134 [3.40]	.170 [4.32]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. TOMSA JUN-8-04		 TE Connectivity							
DIMENSIONS: INCHES[mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	-						
				APVD	-						
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±.025[.64] 4 PLC ±- ANGLES ±0°30'0"		PRODUCT SPEC		NAME					
				108-151020		PLUG #12 HD CONTACT					
				APPLICATION SPEC		DTHD SERIES					
				114-151020		COLOR BLACK					
MATERIAL		FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
				-		A3	00779	G-DTHD06-1-12S		-	
CUSTOMER DRAWING;RESTRICTED CUSTOMER						SCALE	4:1		SHEET	OF	REV
								1		A1	