
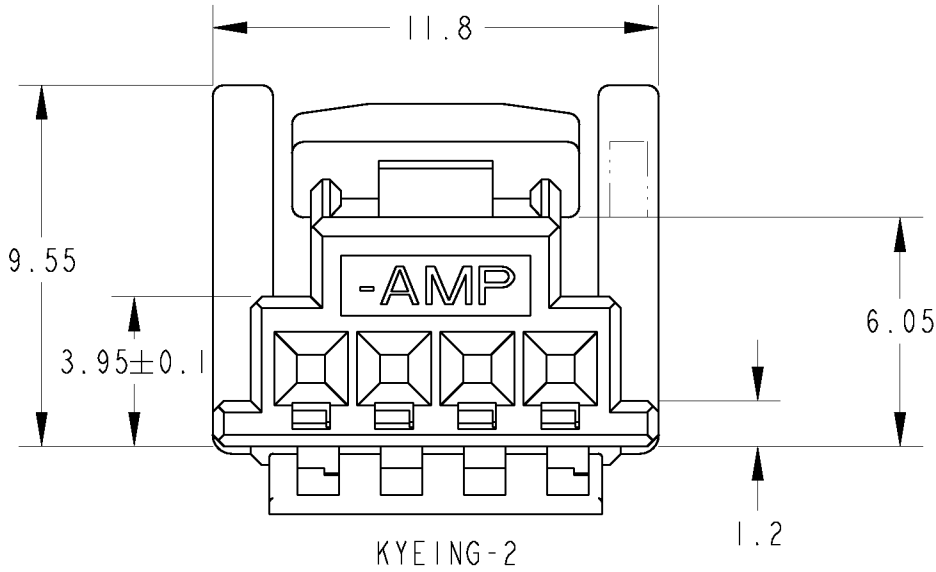
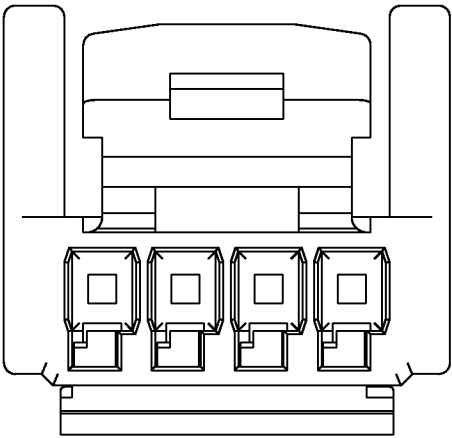
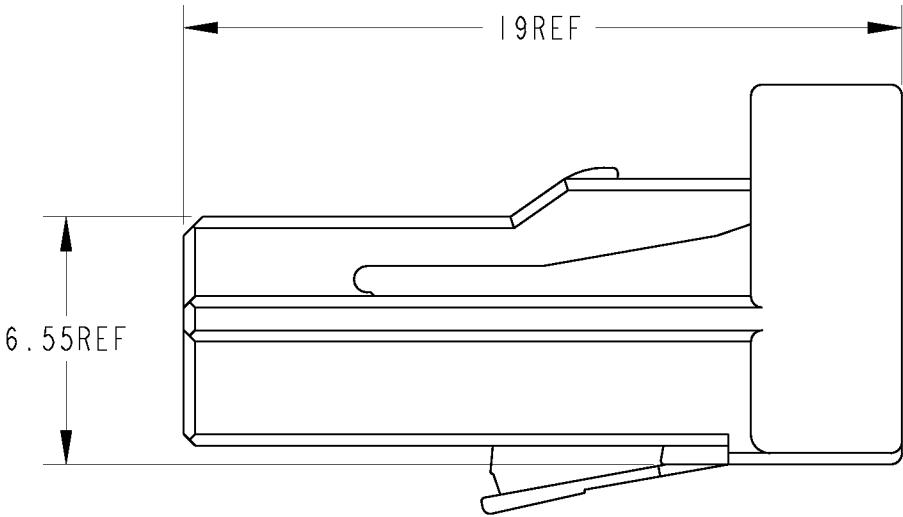


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-		BI	REVISED PER ECO-11-005140	05APR2011	RK

1. DOUBLE LOCK SHOULD BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER

1. ダブルロックは、仮係止状態で出荷される。

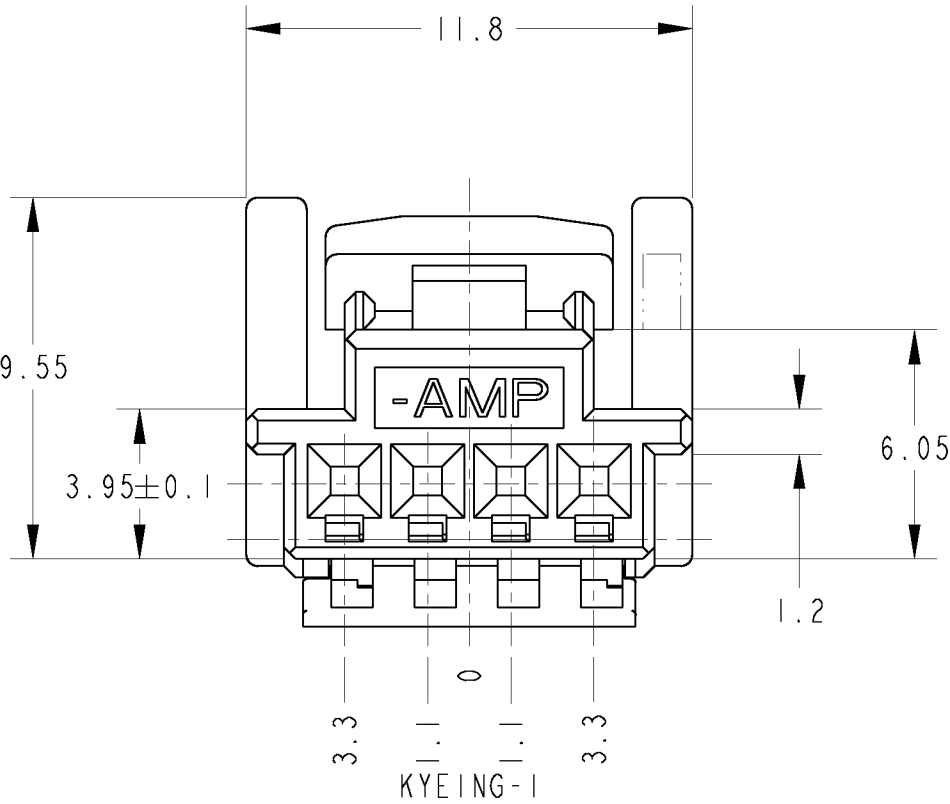

KYEING-2	GRAY	1473672-2
KYEING-1	NATURAL	1473672-1
KYEING	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. MATSUURA	20NOV01	TE TE Connectivity 025 4POSITION PLUG HOUSING		
DIMENSIONS: 単位: ㎜		CHK T. KOHNO	20NOV01			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD N. SAI	20NOV01			
一般公差 ±0.3		PRODUCT SPEC				
0-PLC ±		108-5660		NAME		
1-PLC ±0.1		APPLICATION SPEC		025 4POSITION PLUG HOUSING		
2-PLC ±0.01		取付適用規格		SIZE		
3-PLC ±0.001				CAGE CODE		
4-PLC ±0.0001				DRAWING NO		
ANGLES ±1°00'				1473672		
MATERIAL 材料 PBT		FINISH 仕上 -		RESTRICTED TO		
		WEIGHT 1.0 g		-		
		CUSTOMER DRAWING		SCALE 尺度 5:1		
				SHEET 1 OF 1		
				REV BI		