


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECO-11-005030	11MAR2011	RK	HMR
	C	REVISED PER ECO-13-019231	09DEC2013	DR	RB
	C1	REVISED PER PCN-23-190965	31OCT2023	AP	CB

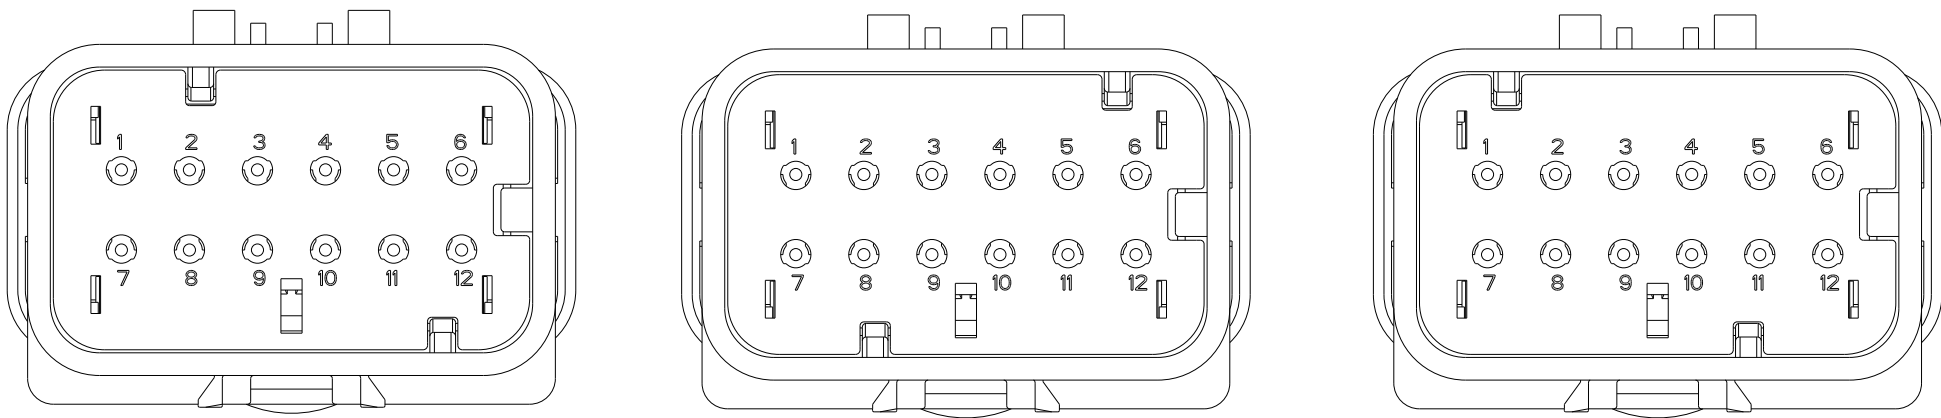


776539-2
SCALE 2:1

776539-3
SCALE 2:1


776539-4
SCALE 2:1

- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST


4. RECOMMENDED WIRE DIAMETER RANGE IS 1.30
TO 2.54mm

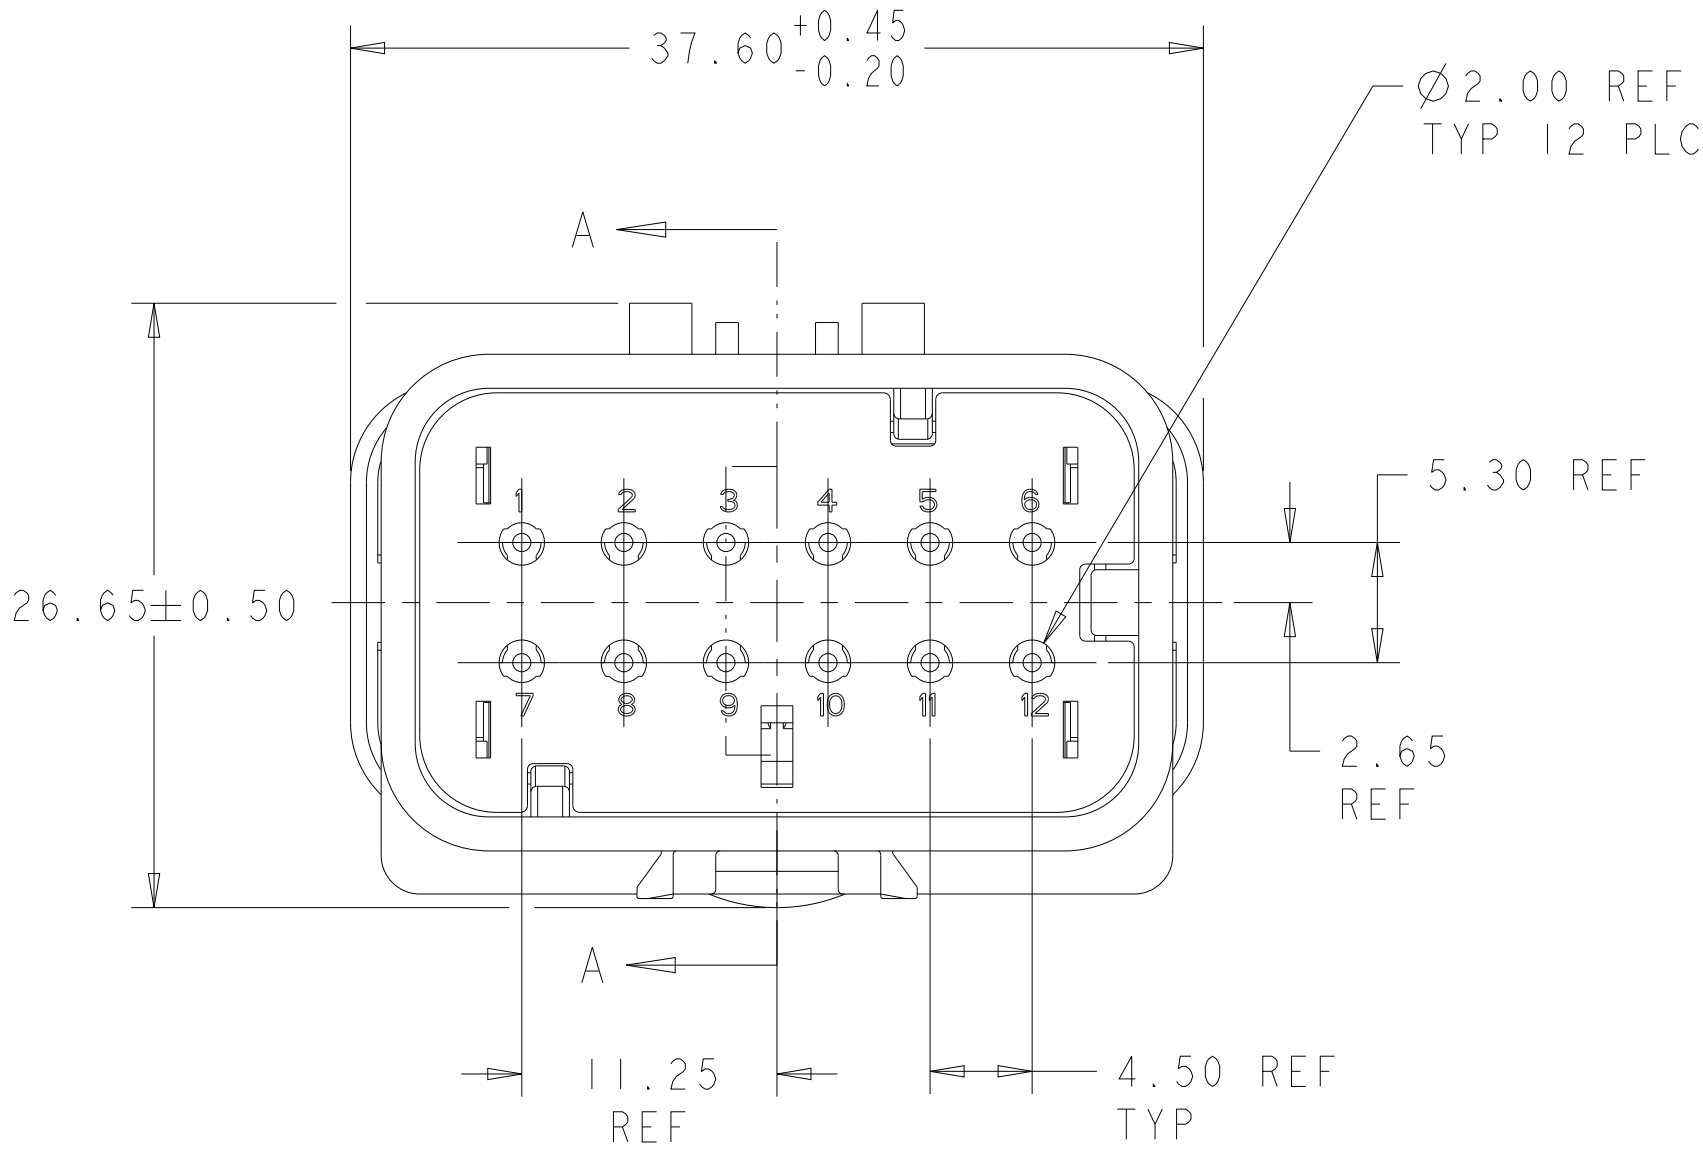

776539-1 SHOWN

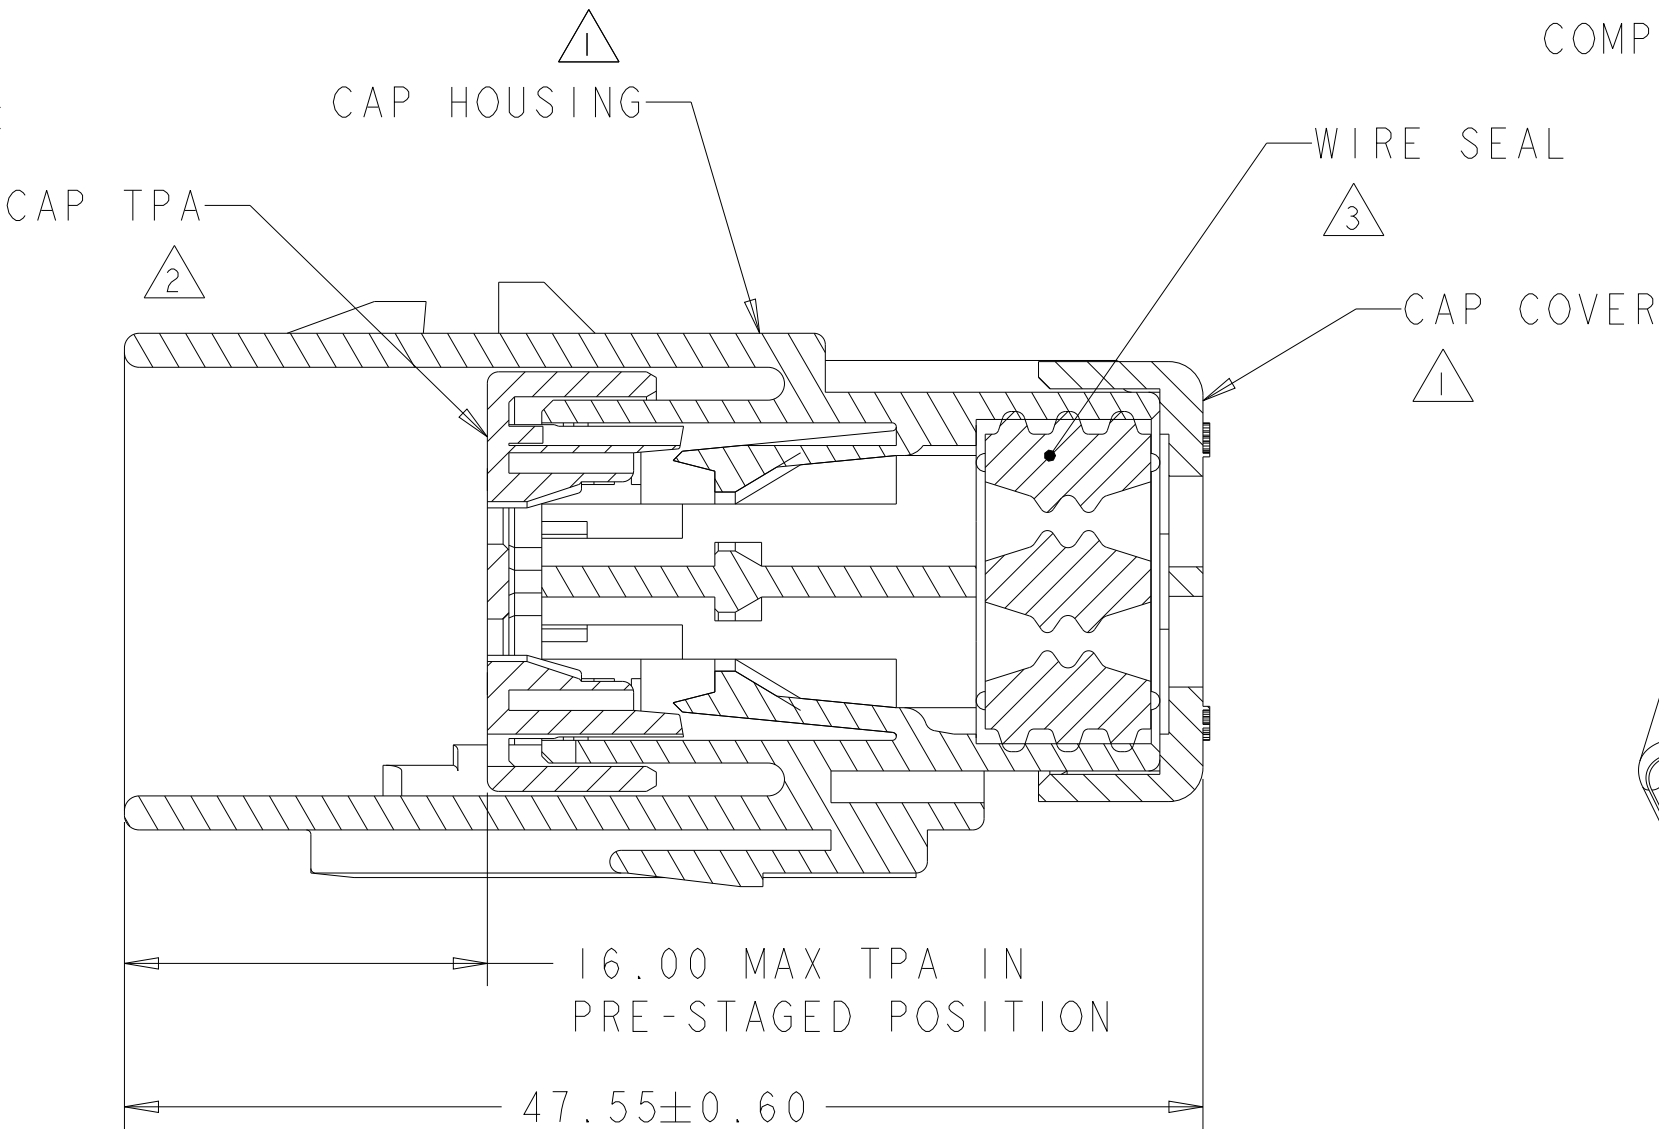


SECTION A-A

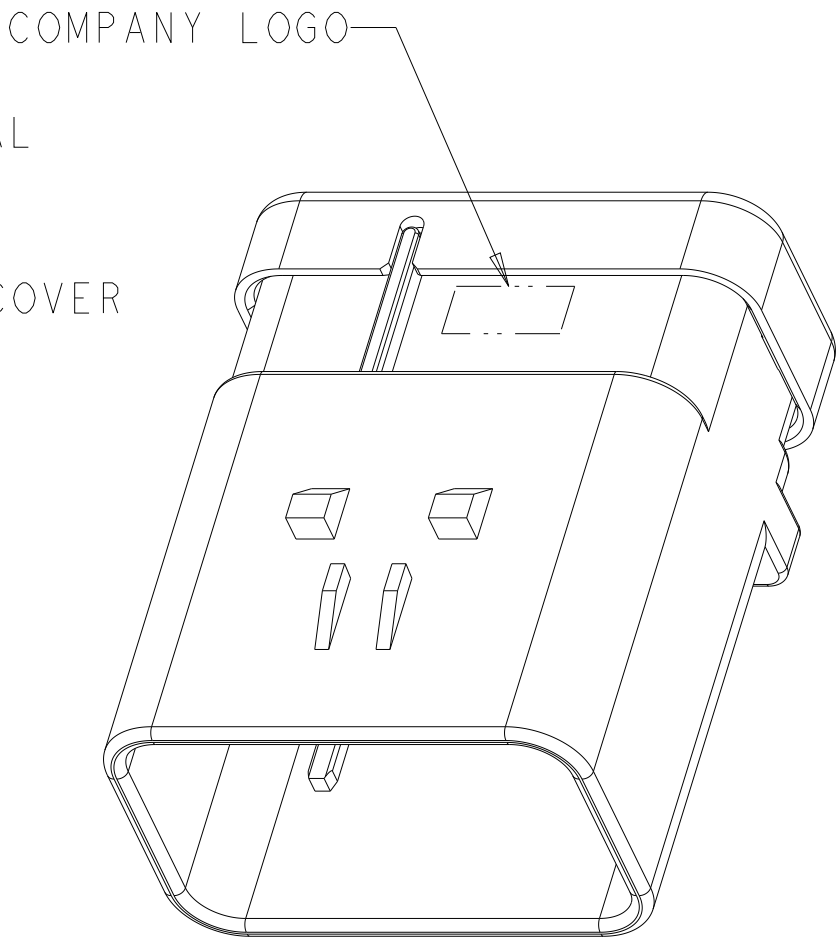

SCALE 2:1

GREEN	776539-4
YELLOW	776539-3
GRAY	776539-2
RED	776539-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. HOELSCHER CHK J. PATTERSON APVD D. KLEIN		04SEP2003 04SEP2003 04SEP2003		 TE Connectivity									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		CAP ASSEMBLY, 12 POSITION, 2 ROW, AMPSEAL 16 CONNECTOR REDUCED DIA WIRE SEAL									
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-2184 APPLICATION SPEC 114-13065		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL - -		FINISH - -		WEIGHT 22.5		A2		00779		C=776539		-			
Customer Drawing						SCALE		2:1		SHEET		OF 1		REV C1	