

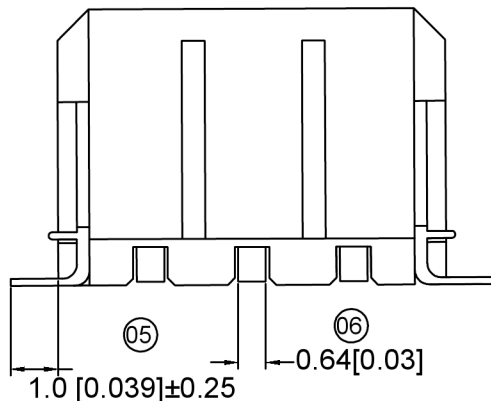
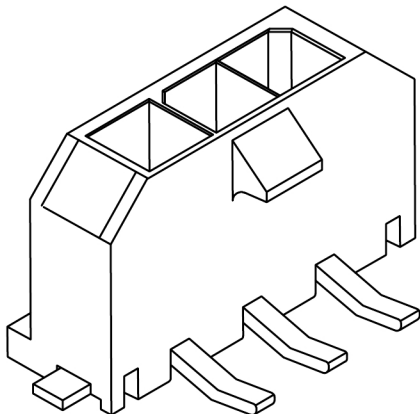


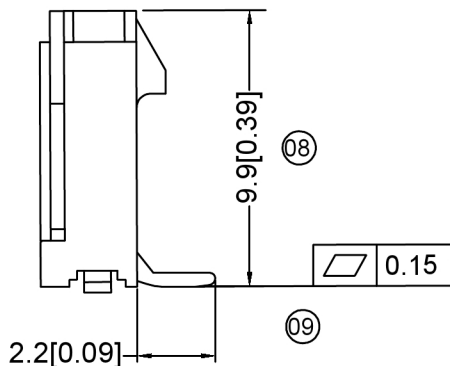

Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing : $\leq 20m\Omega$
- Mark "*"Indicate Dimensions Need To Controlled In Emphasis

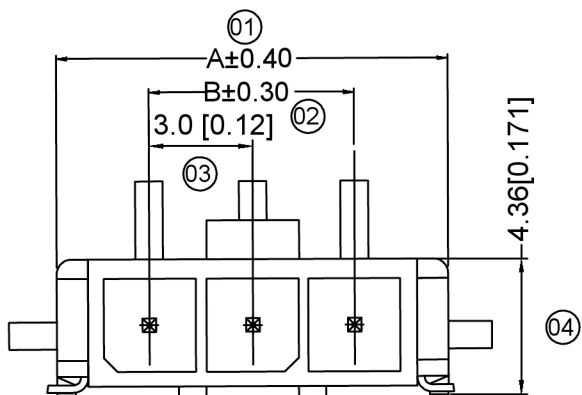

X3025 W V S- XX D-LP XX XX
01 02 03 04 05 06 07 08 09

- 01 Series No.
02 Category :
W-wafer
03 Welding Board Angle:
V-180°
04 Welding Way:
S-SMT
05 Row No.-Pin No.
XX-Single row
06 Special NO.
D-Solder Tabs
07 Material:
LP-LCP 94V-0
08 Planting Category:
V**;All Gold-Plated
G**;Gold-Plated Contact
*01-Gold Flash ; *02-2U" ; *03-3U" ; *05-5U"
*10-10U" ; *15-15U" ; *30-30U" ; *50-50U"
SN-Bright tin plating 70U"
SN1-Bright tin plating 120U"Min. ;
SW-Fog Tin plating
09 Color:
Blank-natural color

Poles	Dimension s(mm)		
	A	B	C
02	9.70	3.00	12.50
03	12.70	6.00	15.50
04	15.70	9.00	18.50
05	18.70	12.00	21.50
06	21.70	15.00	24.50
07	24.70	18.00	27.50
08	27.70	21.00	30.50
09	30.70	24.00	33.50
10	33.70	27.00	36.50
11	36.70	30.00	39.50
12	39.70	33.00	42.50

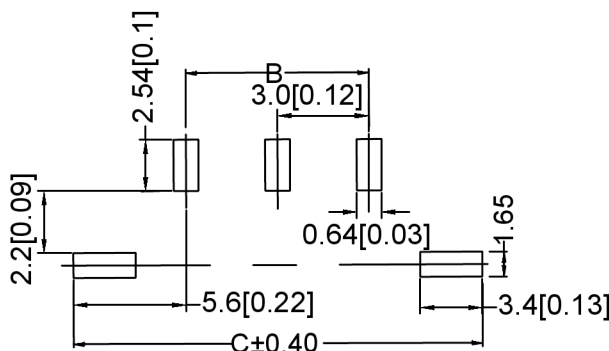

X3025 WVS-XXD-LPSW	LCP UL 94V-0	Brass	Tin Plated Fog	Brass	Tin Plated Fog	X3025H
X3025 WVS-XXD-LPSN	LCP UL 94V-0		Tin-Plated		Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB 5.70]Housing

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
文件工程章					

DSND	DATE	SCALE: N/A	MODEL TYPE: X3025WVS-XXD-LPXX
DWN	DATE	VIEW: 3.00mm Crimp Style Connectors	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0