

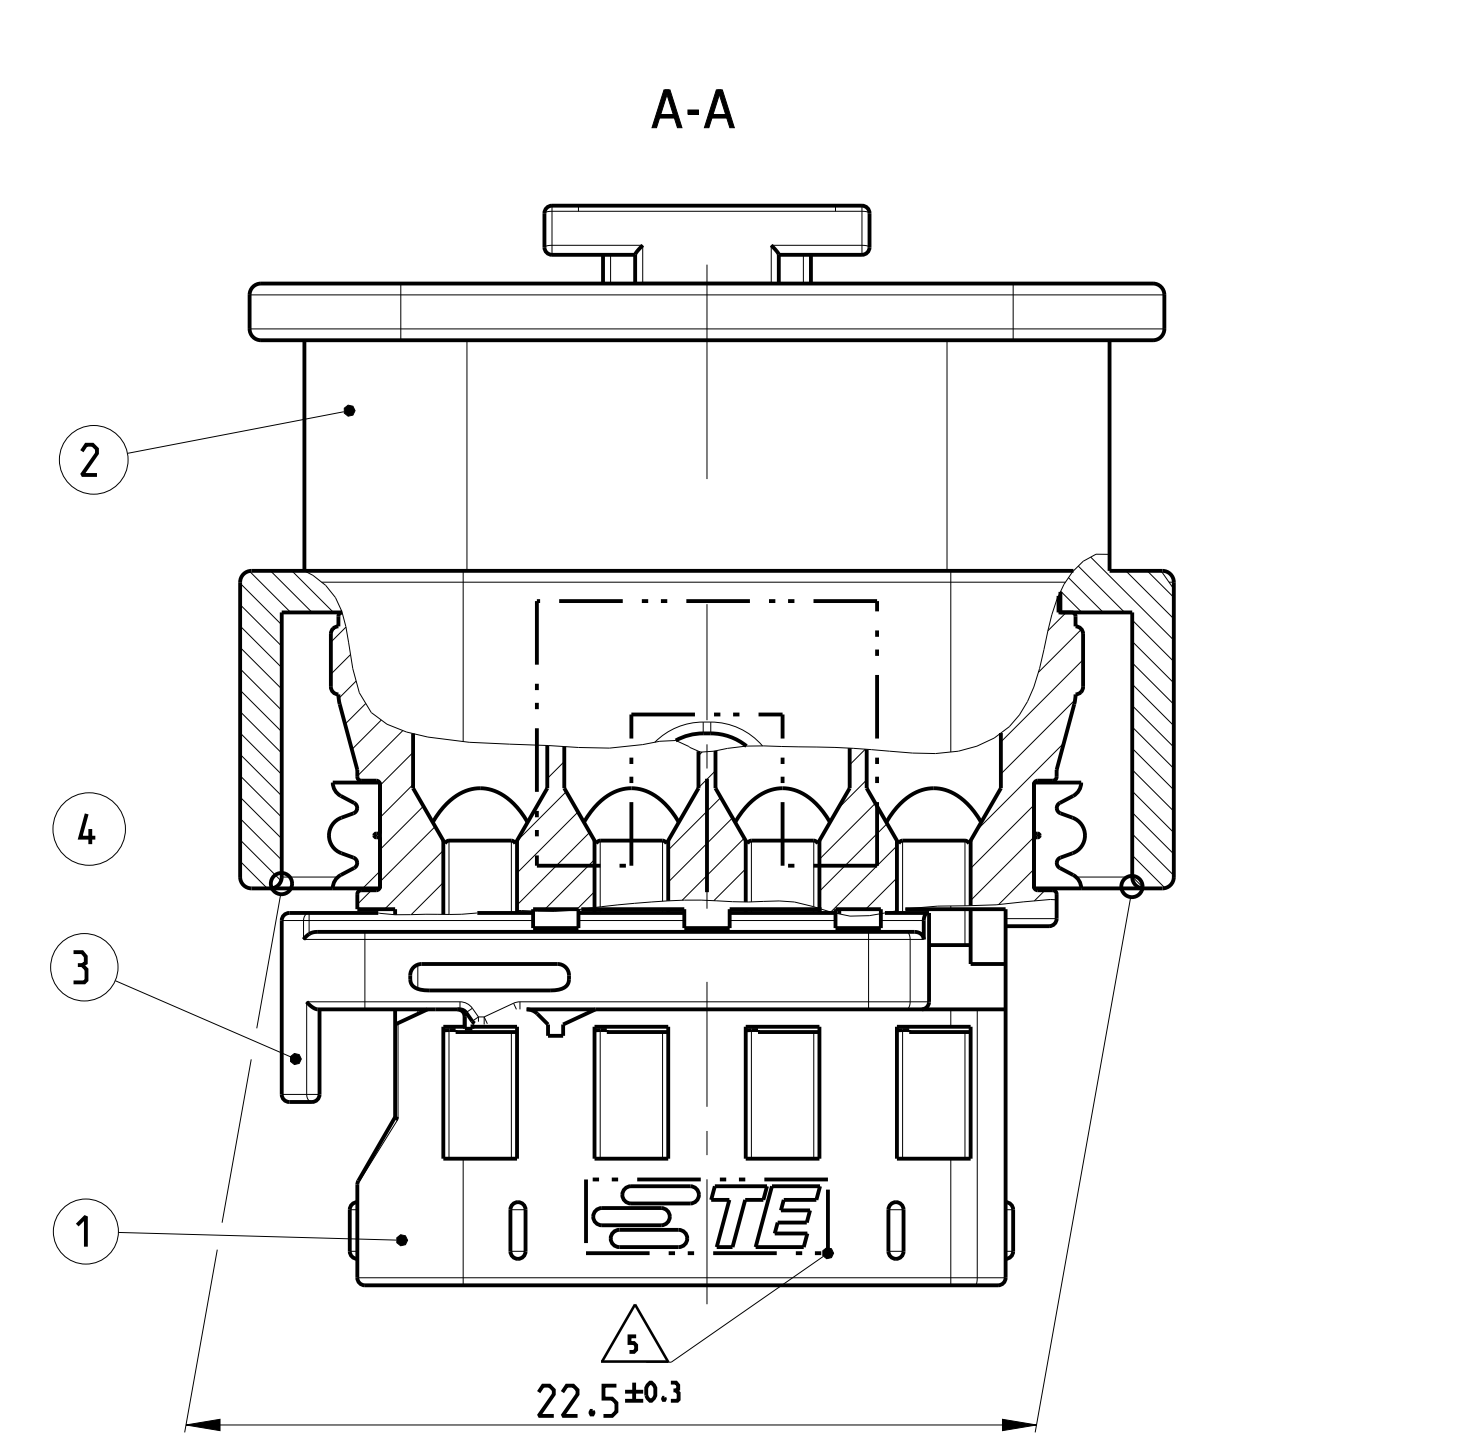
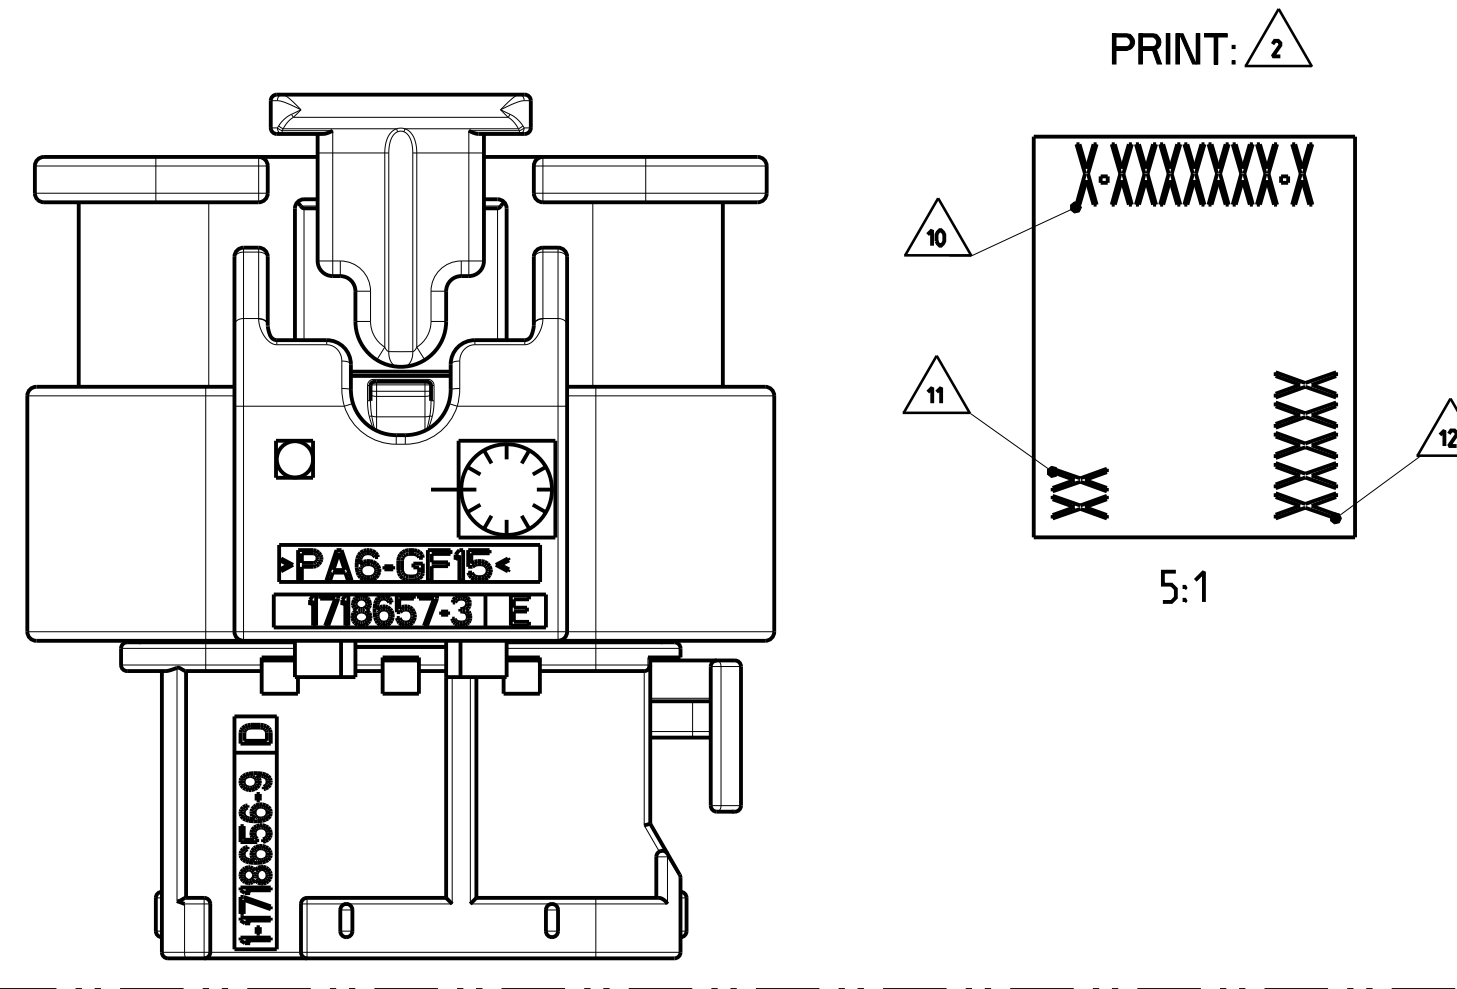
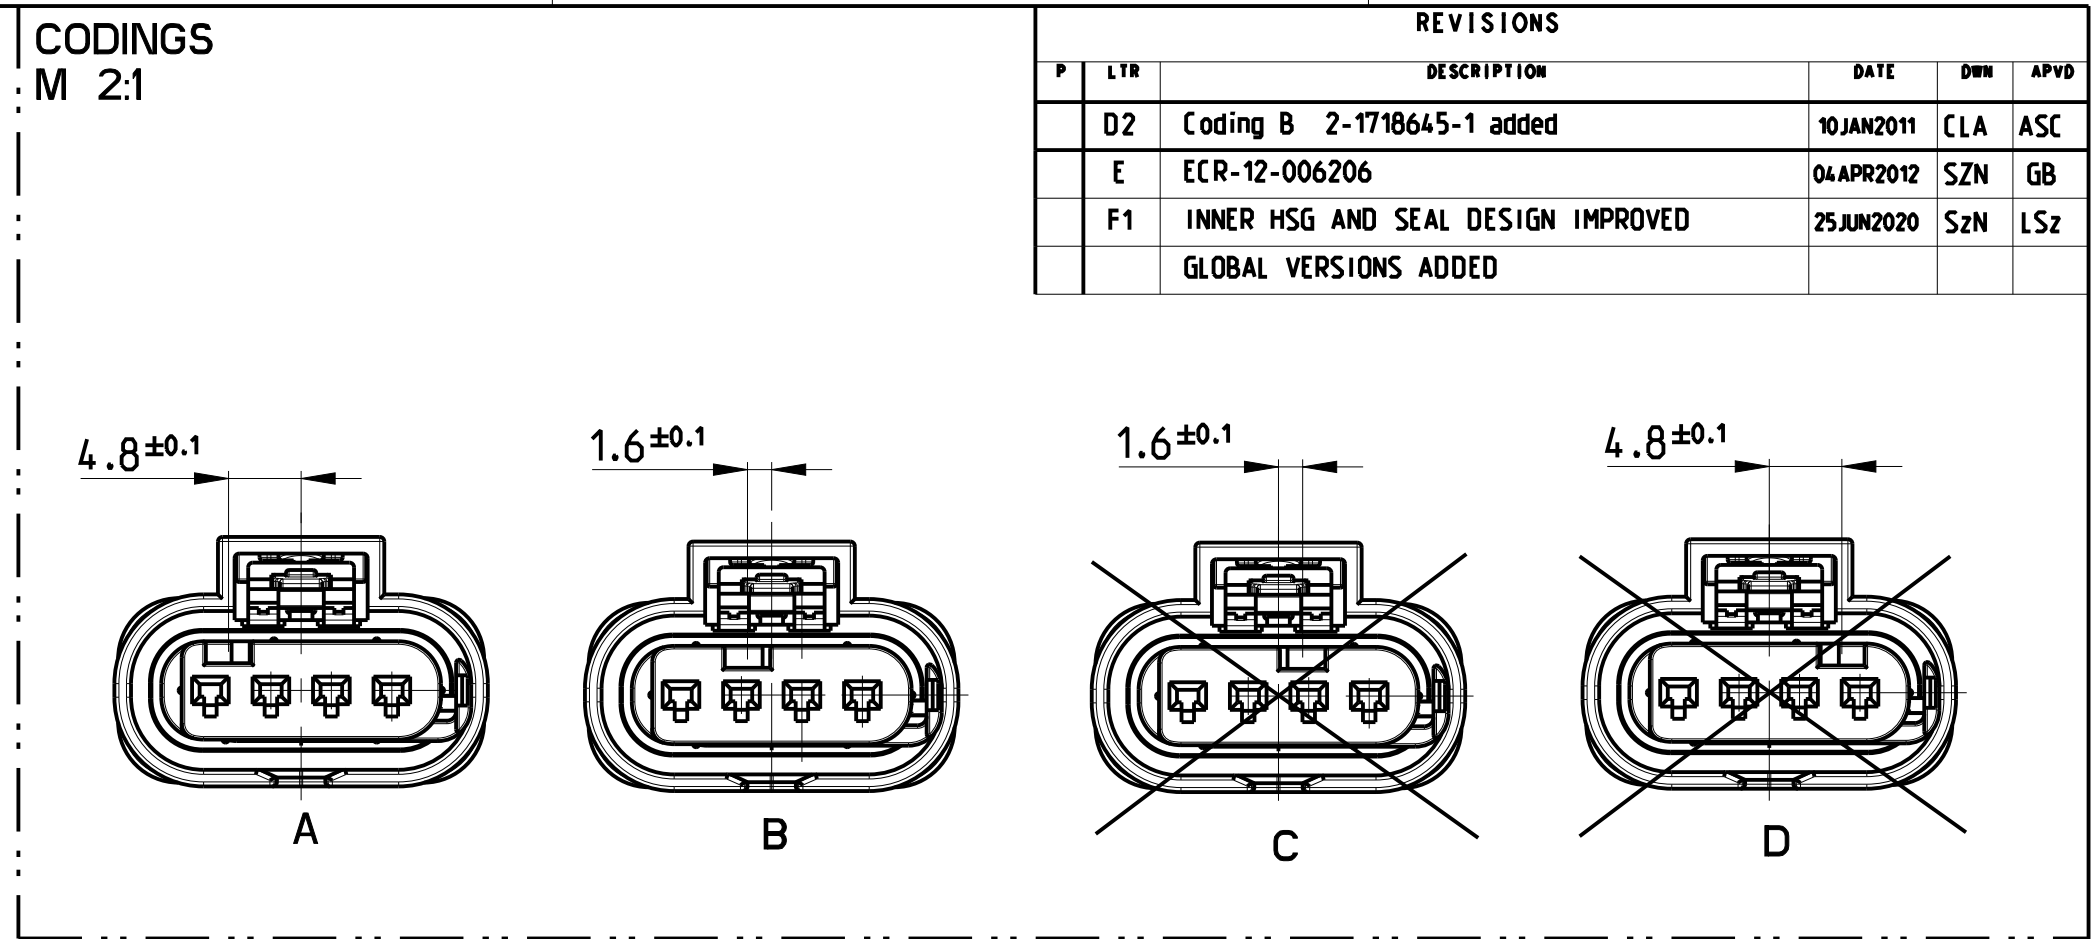
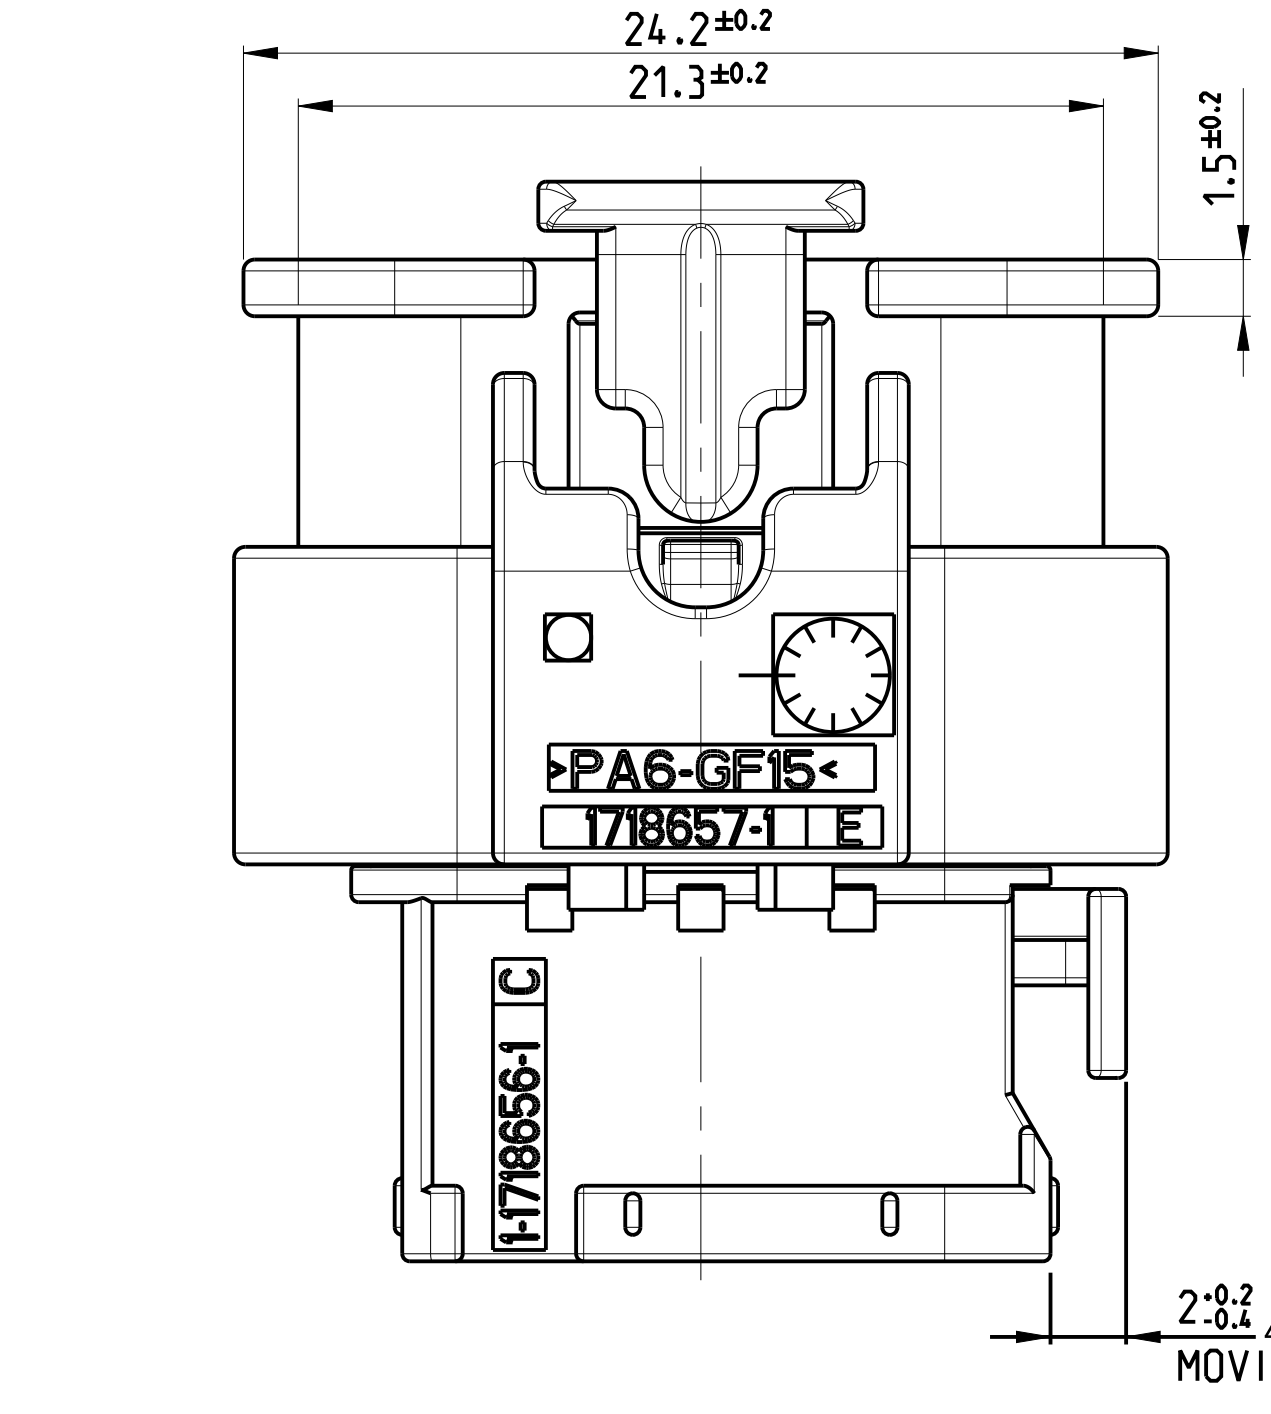
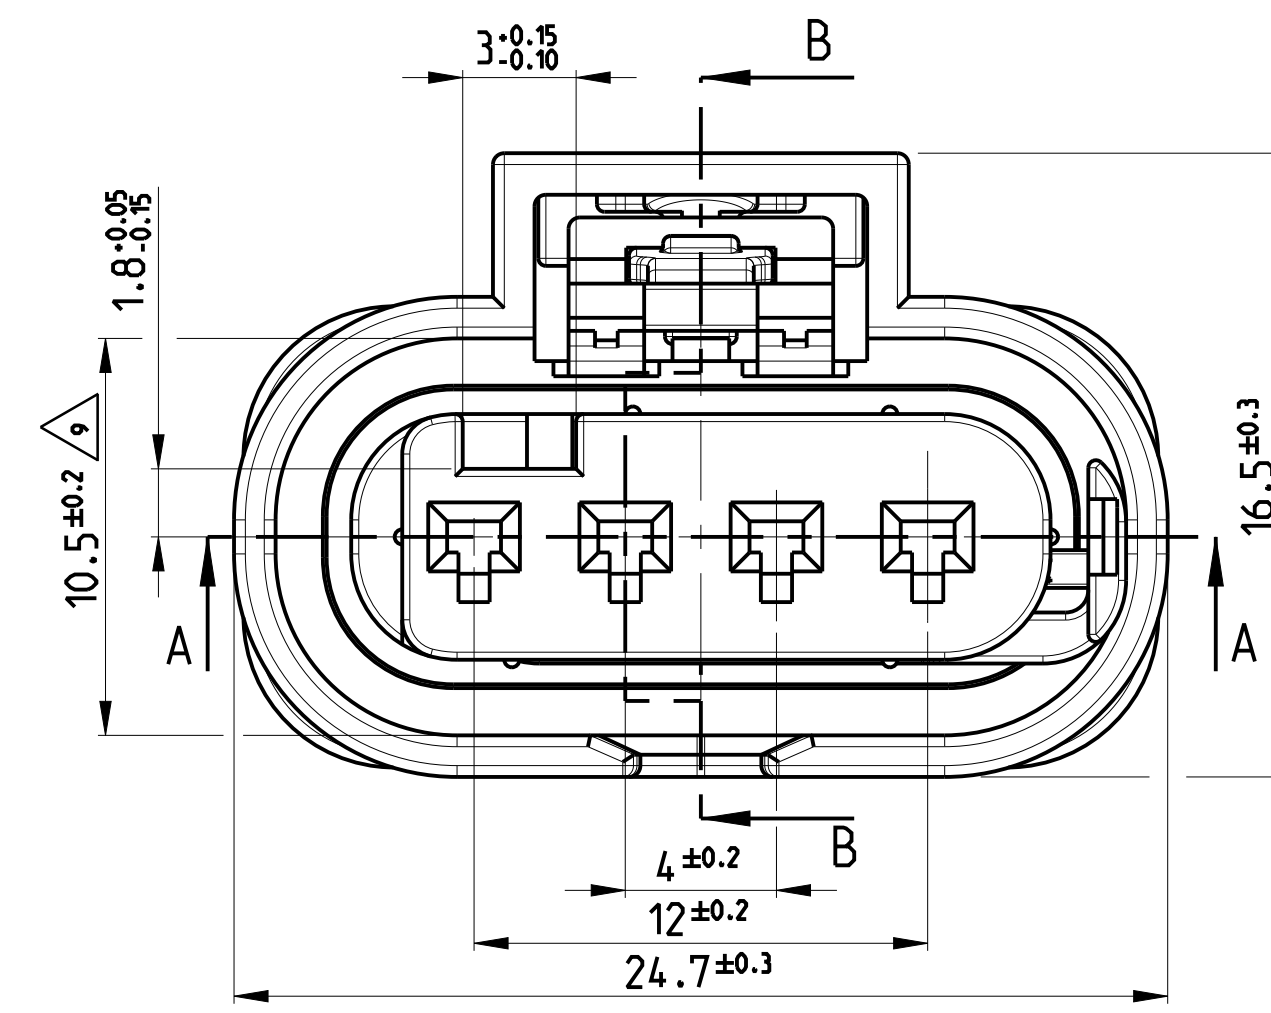
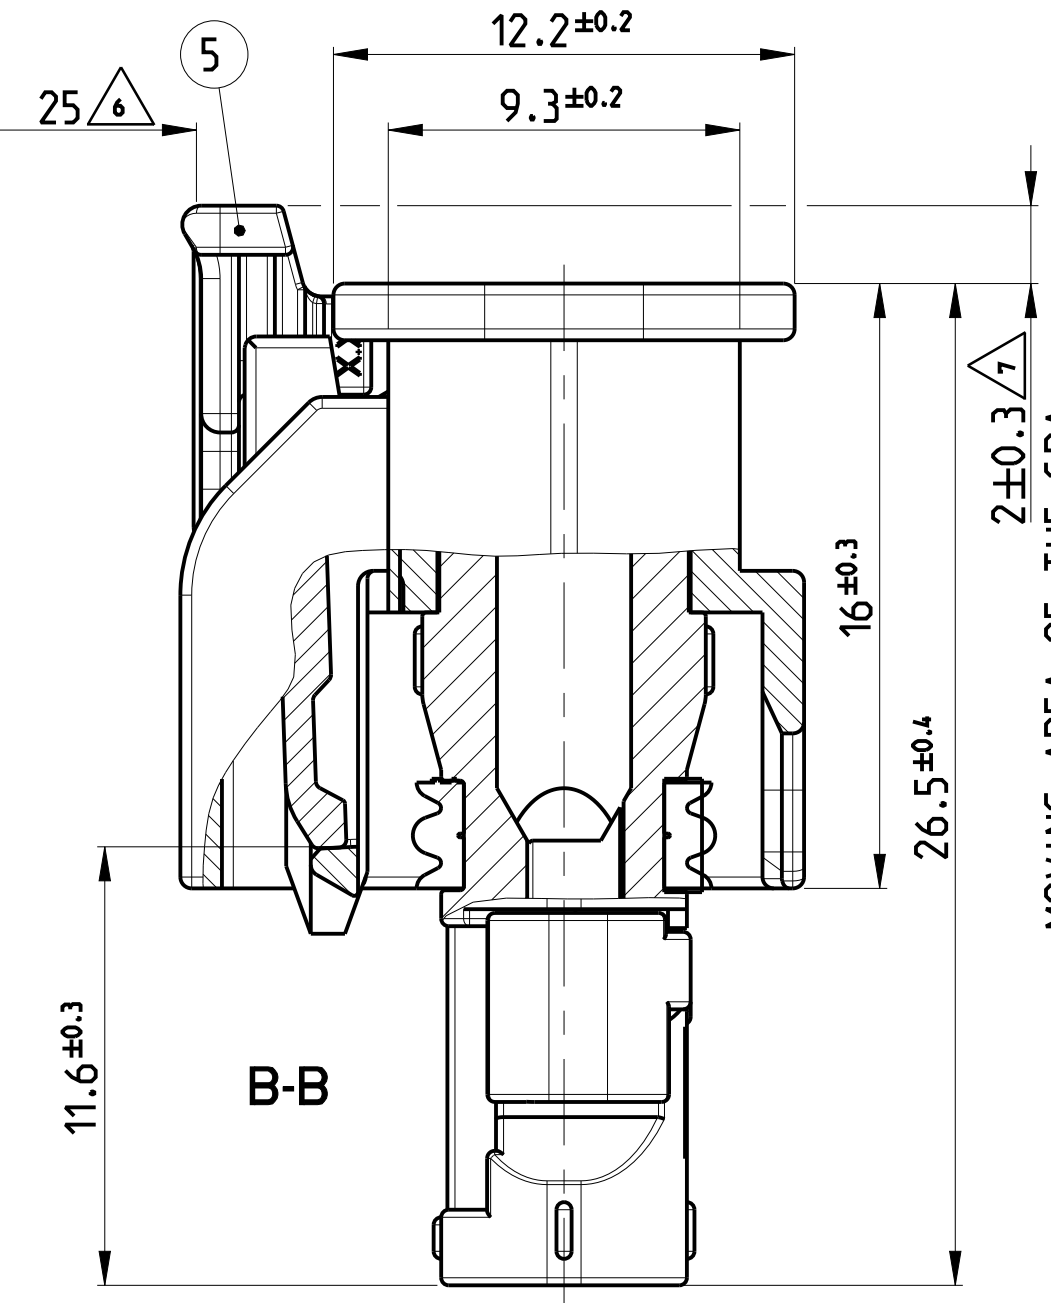


VERSION WITH NEW REVISION REC. HOUSING
AND SEAL

1-1718645-3

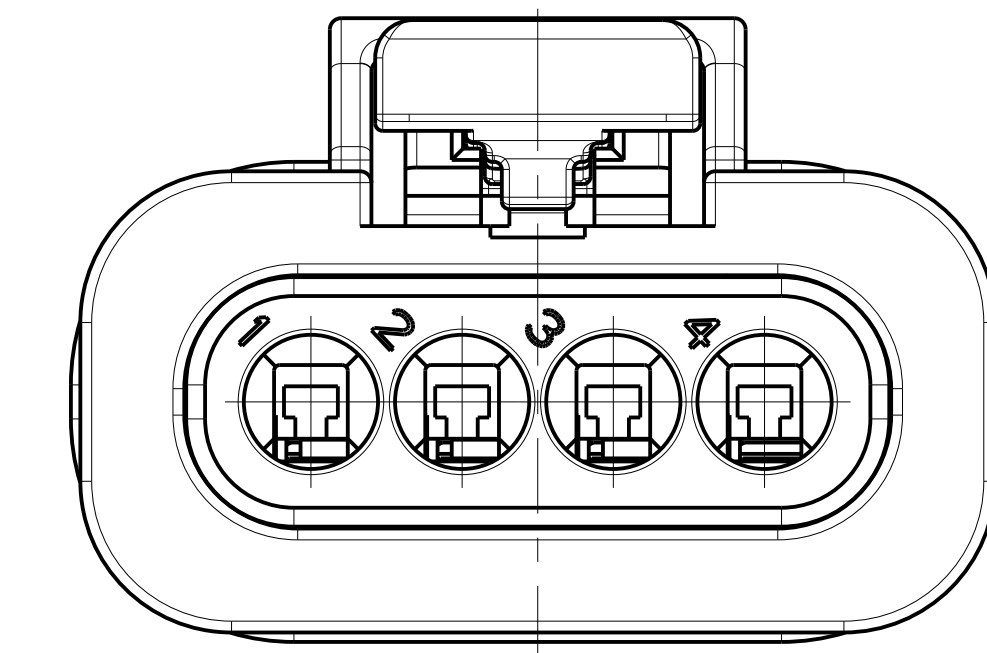


TE- ORDER-NO.	COD	DEFINITION	REV	QTY	DEFINITION	MATERIAL	SURFACE/COLOUR	ITEM
1-1718645-3	A	4pos. MCON 1.2 - LL Connector, Sealed	F	1	MCON 1.2 - CPA	PA46-GF15	RED	5
				1	4pos. MCON 1.2 - Seal	MVQ	NATURE	4
				1	4pos. MCON 1.2 - Retainer	PA66-GF15	VIOLET	3
				1	4pos. MCON 1.2 - Protec. Cover	PA6-GF15	YELLOW	2
2-1718645-1	B	4pos. MCON 1.2 - LL Connector, Sealed	E	1	4pos. MCON 1.2 - Rec. Housing	PA66-GF30	BLACK	1
				1	MCON 1.2 - CPA	PA46-GF15	GREY	5
				1	4pos. MCON 1.2 - Seal	MVQ	NATURE	4
				1	4pos. MCON 1.2 - Retainer	PA66-GF15	VIOLET	3
1-1718645-1	A	4pos. MCON 1.2 - LL Connector, Sealed	E	1	4pos. MCON 1.2 - Protec. Cover	PA6-GF15	BLACK	2
				1	4pos. MCON 1.2 - Rec. Housing	PA66-GF30	BLACK	1
				1	MCON 1.2 - CPA	PA46-GF15	GREY	5
				1	4pos. MCON 1.2 - Seal	MVQ	NATURE	4


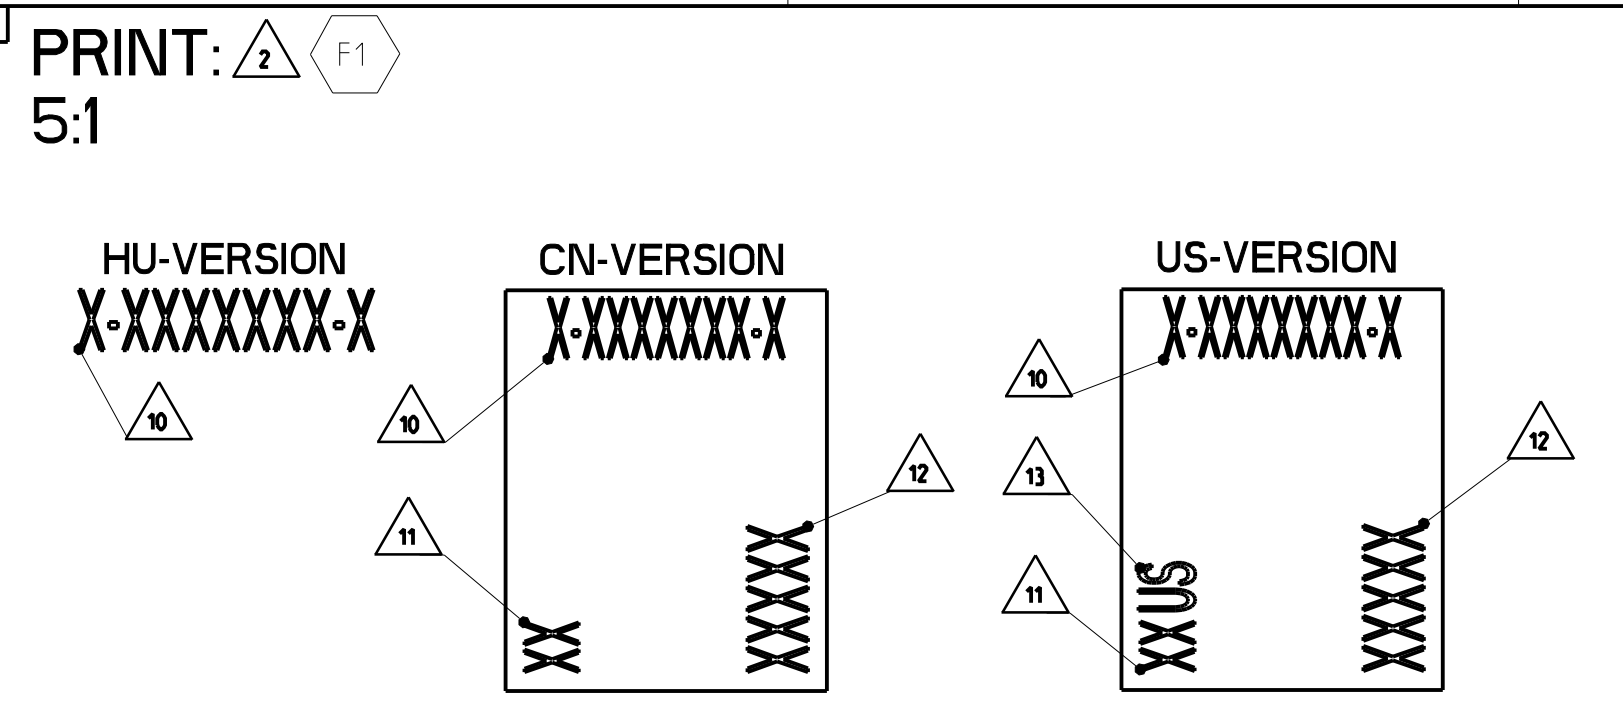


- NOTES:
- MAX. WIRE SIZE RANGE 1.0 mm² FLR PERMITTED
FOR CAVITY-Ø 3.55MM
QUANTITY SEE WIRE HARNESS DRAWING
FOR PERMISSIBLE CURRENT CARRYING CAPACITY OF THE SINGLE CONTACT
SEE PRODUCT SPECIFICATION NO. 108-18782
 - AREA FOR PRINT
 - USABLE CONTACTS MCON 1.2 LL
SEE TE-NO. 1452674. SINGLE WIRE SEAL-VERSION
 - ACCORDING TO INTERFACE DRAWING 114-18679-3
 - SUPPLIER-MARK
 - SPACE OF ACTIVITY
 - SUPPLY CONDITION: CPA IN PRELOCKED POSITION
 - SUPPLY CONDITION: RETAINER IN PRELOCKED POSITION
 - WARPAGE PERMITTED TO MAX. -0.5mm
 - TE ORDER-NO.
 - ASSEMBLY LINE SEGMENT IDENTIFICATION
 - DATE CODE (DDYY)
 - DIVERGENT MARKING FOR PARTS FROM CHINESE AND U.S. PRODUCTION
- 1-...-1 AS SHOWN

CPA IN END POSITION

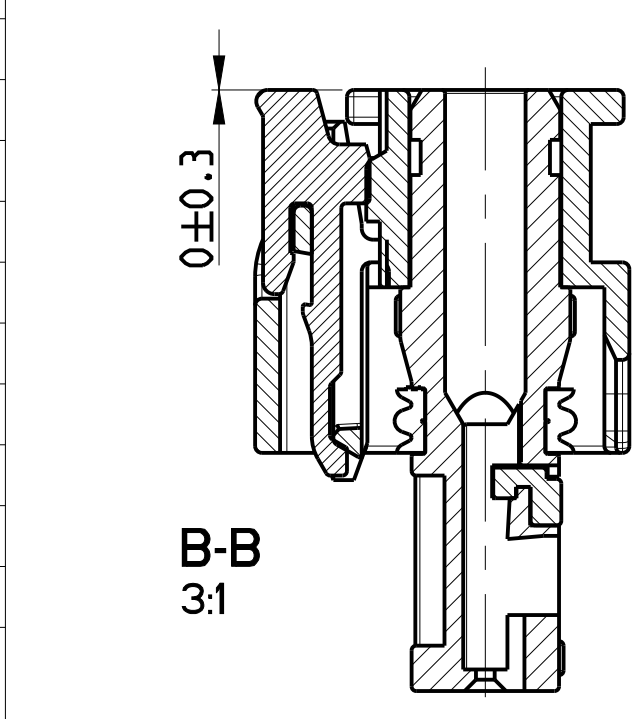

RETAINER IN END POSITION

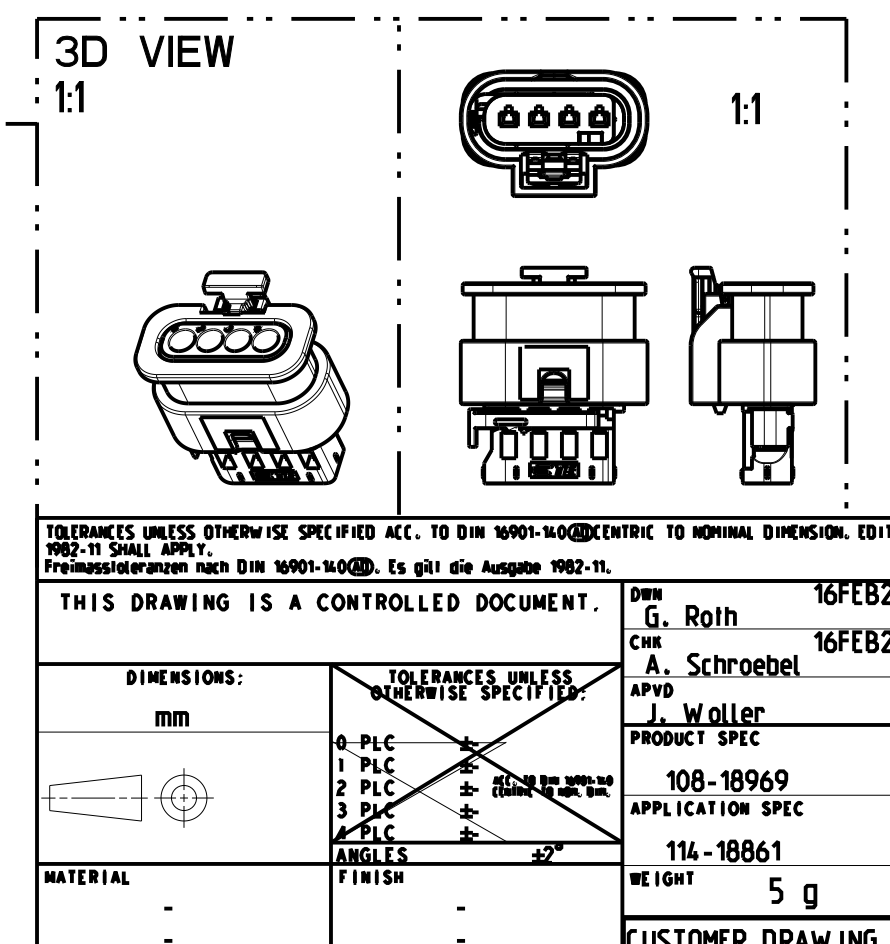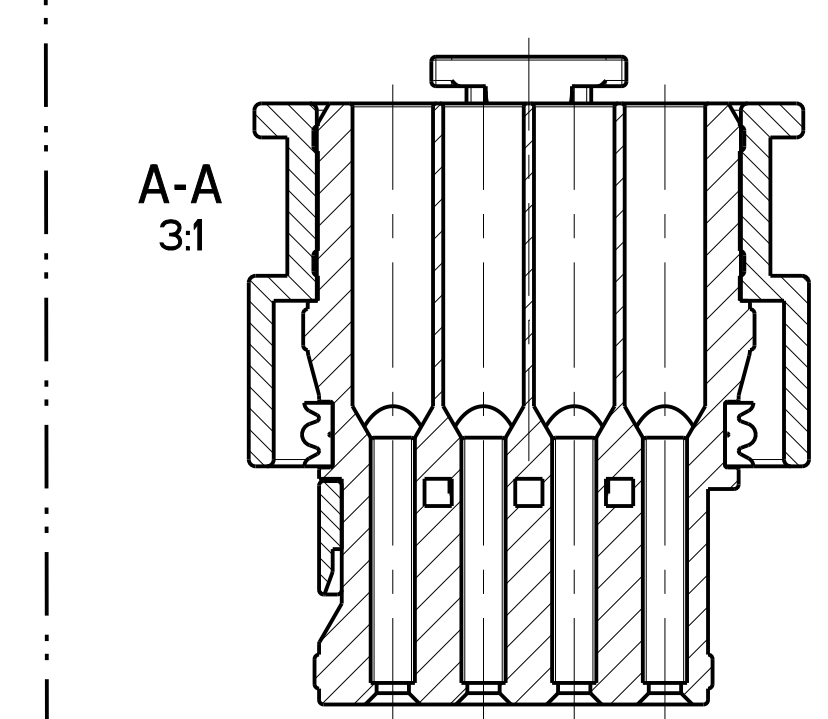

TE Connectivity	NAME	4pos. MCON 1.2 - LL Connector, Sealed
SIZE	CAGE CODE	DRAWING NO.
15:1	00779	1718645
SHEET	1	OF 1
REV	F1	